


Profile T cu margini rotunjite

lamine la cald, conf. DIN 10055, ed. decembrie 1995

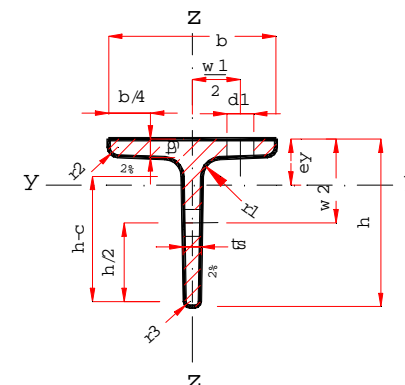

Denumire	Dimensiuni							A	G	ey	Caracteristici sectionale						Gaurire conf. DIN 997 ed. oct. 1970			
	Tip	h	b	ts = tg = r1	r2	r3	c				h-c	y-y			z-z					
												Iy	Wy	iy	Iz	Wz	iz	d1	w1	w2
								cm ²	kg/m	cm	cm ⁴	cm ³	cm	cm ⁴	cm ³	cm	mm	mm	mm	
								mm												
30	30	30	4.0	2.0	1.0	9.00	21	2.3	1.77	0.85	1.72	0.80	0.87	0.9	0.58	0.62	4.3	17	17	
35	35	35	4.5	2.5	1.0	10.00	25	3.0	2.33	0.99	3.10	1.23	1.04	1.6	0.90	0.73	4.3	19	19	
40	40	40	5.0	2.5	1.0	11.00	29	3.8	2.96	1.12	5.28	1.84	1.18	2.6	1.29	0.83	6.4	21	22	
50	50	50	6.0	3.0	1.5	13.00	37	5.7	4.44	1.39	12.10	3.36	1.46	6.1	2.42	1.03	6.4	30	30	
60	60	60	7.0	3.5	2.0	15.00	45	7.9	6.23	1.66	23.80	5.48	1.73	12.2	4.07	1.24	8.4	34	35	
70	70	70	8.0	4.0	2.0	17.00	53	10.6	8.32	1.94	44.40	8.79	2.05	22.1	6.32	1.44	11.0	38	40	
80	80	80	9.0	4.5	2.0	19.00	61	13.6	10.70	2.22	73.70	12.80	2.33	37.0	9.25	1.65	11.0	45	45	
100	100	100	11.0	5.5	3.0	23.00	77	20.9	16.40	2.74	179.00	24.60	2.92	88.3	17.70	2.05	13.0	60	60	
120	120	120	13.0	6.5	3.0	27.00	93	29.6	23.20	3.28	366.00	42.00	3.51	178.0	29.70	2.45	17.0	70	70	
140	140	140	15.0	7.5	4.0	31.00	109	39.9	31.30	3.80	660.00	64.70	4.07	330.0	47.20	2.88	21.0	80	75	

Nota

Setul de date a fost colationat cu cea mai mare atentie. Pentru eventuale erori de redactare nu preluam nici o raspundere.

Sursa: Stahlbau-Profile, ed. a 22-a, Verlag Stahleisen GmbH, 1999

DeltaMETALS®

a division of DeltaTHERM TRADING s.r.l.

e-mail: deltametals@fx.ro